

# HUBER

## TECHNOLOGY

WASTE WATER Solutions

### HIRE UNITS

## HUBER Micro Strainer ROTAMAT® Ro9

### COMBINED SCREEN

Inlet screen for flows up to 230 l/s. The screen incorporates screenings washing, conveying and dewatering. Available with 3mm or 6mm perforated mesh.


Robust stainless steel construction and fully frost protected.

### SPECIFICATION

### Ro9 COMBINED SCREENED

Flow capacity	Up to 340 l/s
Screening capacity channel width	300 - 700mm
Electrical supply	20 AMP, 400V, 3ph+N+E 50hz
Washwater connection	1 1/4 BSP (supply pressure: 4-7 bar max.)
Washwater consumption	2 l/s @ 4-7 bar
Dry weight	Up to 730kg

**HIRE COSTS - PLEASE CONTACT US FOR HIRE COSTS**

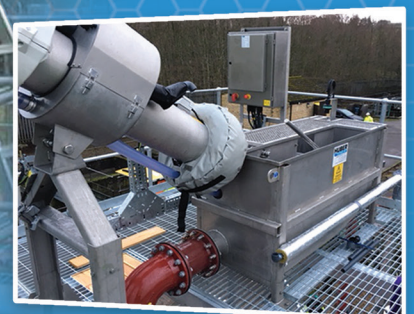

For any more information or enquiries please do not hesitate to contact our Hire Department on: